



Application: resin, composite materials and others.
Mounting: by adhesive, moulding.



Type T

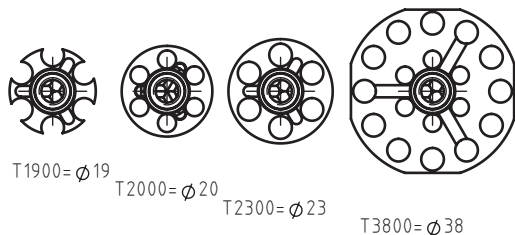

Type Q



Type R

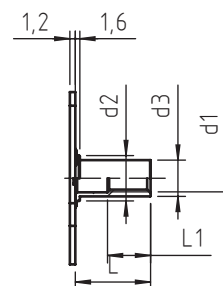

code	thread d1	d2	d3	Ø holes	L = bushing lenght											L1
					5	6	10	12	14	15	16	20	22	25	30	
BRC_Q3232040.____	M 4	12,1	8,5	5												at least 3 times d1
BRC_T1900040.____				5												
BRC_T2000040.____				4												
BRC_T2300040.____				5												
BRC_T3800040.____				5												
BRC_R3815040.____				5												
BRC_Q3232050.____	M 5	13,1	9,7	5												
BRC_T1900050.____				5												
BRC_T2000050.____				4												
BRC_T2300050.____				5												
BRC_T3800050.____				5												
BRC_R3815050.____				5												
BRC_Q3232060.____	M 6	13,1	9,7	5												
BRC_T1900060.____				5												
BRC_T2000060.____				4												
BRC_T2300060.____				5												
BRC_T3800060.____				5												
BRC_R3815060.____				5												
BRC_Q3232080.____	M 8	15,1	11,2	5												
BRC_T2300080.____				5												
BRC_T3800080.____				5												
BRC_R3815080.____				5												
BRC_Q3232100.____	M 10	16,1	12,8	5												
BRC_T2300100.____				5												
BRC_T3800100.____				5												
BRC_R3815100.____				5												

Non binding dimensions, expressed in mm.

Standard On demand Not manufactured

Material: steel _____,12, stainless steel AISI 316 L _____,51

Finishing: bushing in steel: zinc coated
bushing in stainless steel AISI 316 L: natural

Tolerance: where not specified, coarse degree of accuracy,
according to ISO 2768-m

Thread: metric ISO 6 H

Example: threaded bushing blind with rectangular plate,
M5 thread, length 12 mm, zinc coated steel: BRC12R3815050.12

