


Applications: metal sheets, stainless steel, light alloy, non-ferrous metals.
Assembly: by pressure.

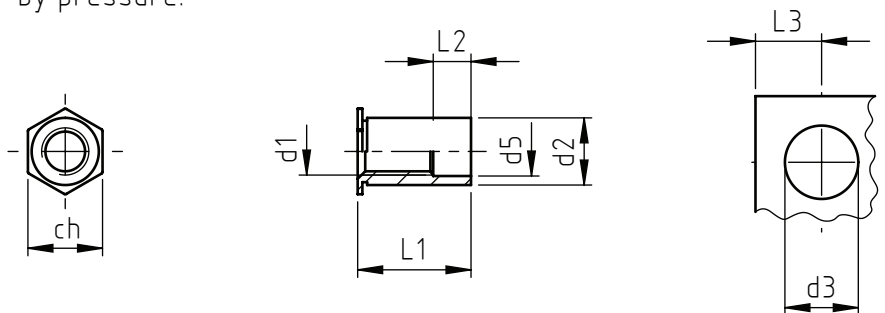

code	metric thread d1	sheet thickness min	external diameter d2 0/-0,10	internal diameter d5	hexagonal wrench ch	hole diameter d3 +0,08/0	distance from the edge (min.) L3
__0 030.__	M3 (a)	1,0	4,19	3,2	4,8	4,2	6,0
__1 030.__	M3 (b)	1,0	5,38	3,2	6,4	5,4	7,0
__0 040.__	M4	1,3	7,11	4,8	7,9	7,2	8,0
__0 050.__	M5	1,3	7,11	5,2	7,9	7,2	8,0



code	standoff length L1	L2 ±0,4	thread			
			M3 (a)	M3 (b)	M4	M5
DP03 __ __ __	3	0				
DP04 __ __ __	4	0				
DP05 __ __ __	5	0				
DP06 __ __ __	6	0				
DP08 __ __ __	8	0				
DP10 __ __ __	10	4				
DP12 __ __ __	12	4				
DP14 __ __ __	14	4				
DP16 __ __ __	16	8				
DP18 __ __ __	18	8				
DP20 __ __ __	20	10				
DP22 __ __ __	22	12				
DP25 __ __ __	25	12				

(a) data refer to the code __0 030.__ with diameter 4,19 mm.
(b) data refer to the code __1 030.__ with diameter 5,38 mm.

Non binding dimensions, expressed in mm.

Standard
On demand
Not manufactured

Material: steel, stainless steel
Finishing: standoff in steel: zinc plated (su 80 HRB max) _____.12
standoff in stainless steel: natural (su 70 HRB max) _____.50
Thread d1: metric ISO 6 H
Example: through threaded standoff, M5 thread, length L1=6mm, zinc plated steel: DP06 0 050.12

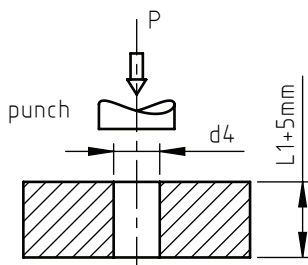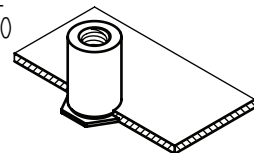

counter punch

thread	counter punch hole diameter d4
M3 (a)	4,3
M3 (b)	5,5
M4	7,3
M5	7,3

Anchorage pressure may vary depending on material hardness.
The optimum pressure value is empirically achieved.
For a correct use of the products observe the specified hole diameters and tolerances.
DP standoff must be inserted flat to the sheet metal surface. Avoid any over-pressure.
It is advisable to carry out some preliminary assembling tests in order to have the best assembly.