


Applications: metal sheets, stainless steel, light alloy, non-ferrous metals.
Assembly: by pressure.

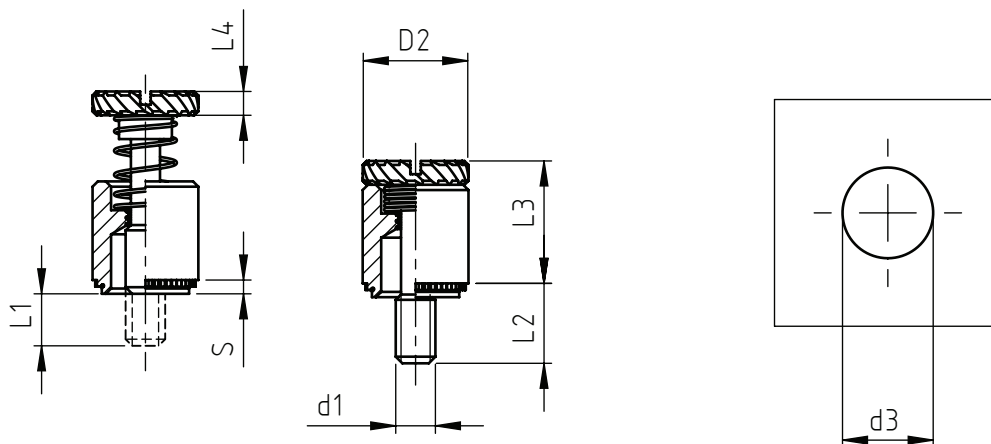

code	d1	sheet thickness (min)	L1 $\pm 0,40$	L2 $\pm 0,40$	L3 (max)	L4 $\pm 0,13$	D2 $+0,40/-0,15$	S (max)	d3 $+0,08/-0$
CVIS 0 030.12	M3	1,53	0	6,4	9,14	1,83	7,92	1,53	6,73
CVIS 1 030.12			3,2	9,5					
CVIS 0 040.12	M4	1,53	0	7,9	11,43	2,08	9,53	1,53	7,92
CVIS 1 040.12			3,2	11,1					
CVIS 2 040.12			6,4	14,3					
CVIS 0 050.12	M5	1,53	0	7,9	11,47	2,08	10,31	1,53	8,74
CVIS 1 050.12			3,2	11,1					
CVIS 2 050.12			6,4	14,3					
CVIS 0 060.12	M6	1,53	0	9,5	14,73	2,46	11,89	1,53	10,49
CVIS 1 060.12			3,2	12,7					
CVIS 2 060.12			6,4	15,9					

Non binding dimensions, expressed in mm.

Standard

On demand

Not manufactured

Material: steel (on 60 HRB max)

Finishing: nickel-plating

Example: self clinching screw, M5 thread,
sheet thickness 2,0 mm, nickel-plated steel:
CVIS 1 050.12

